


ADJUSTABLE REAR RACK

PLEASE READ ALL INSTRUCTIONS BEFORE
INSTALLING YOUR NEW CARGO RACK

WARNING!



FAILURE TO INSTALL ACCESSORIES
PROPERLY MAY RESULT IN SERIOUS
INJURY, DEATH OR WORSE, DAMAGE
TO YOUR BICYCLE!

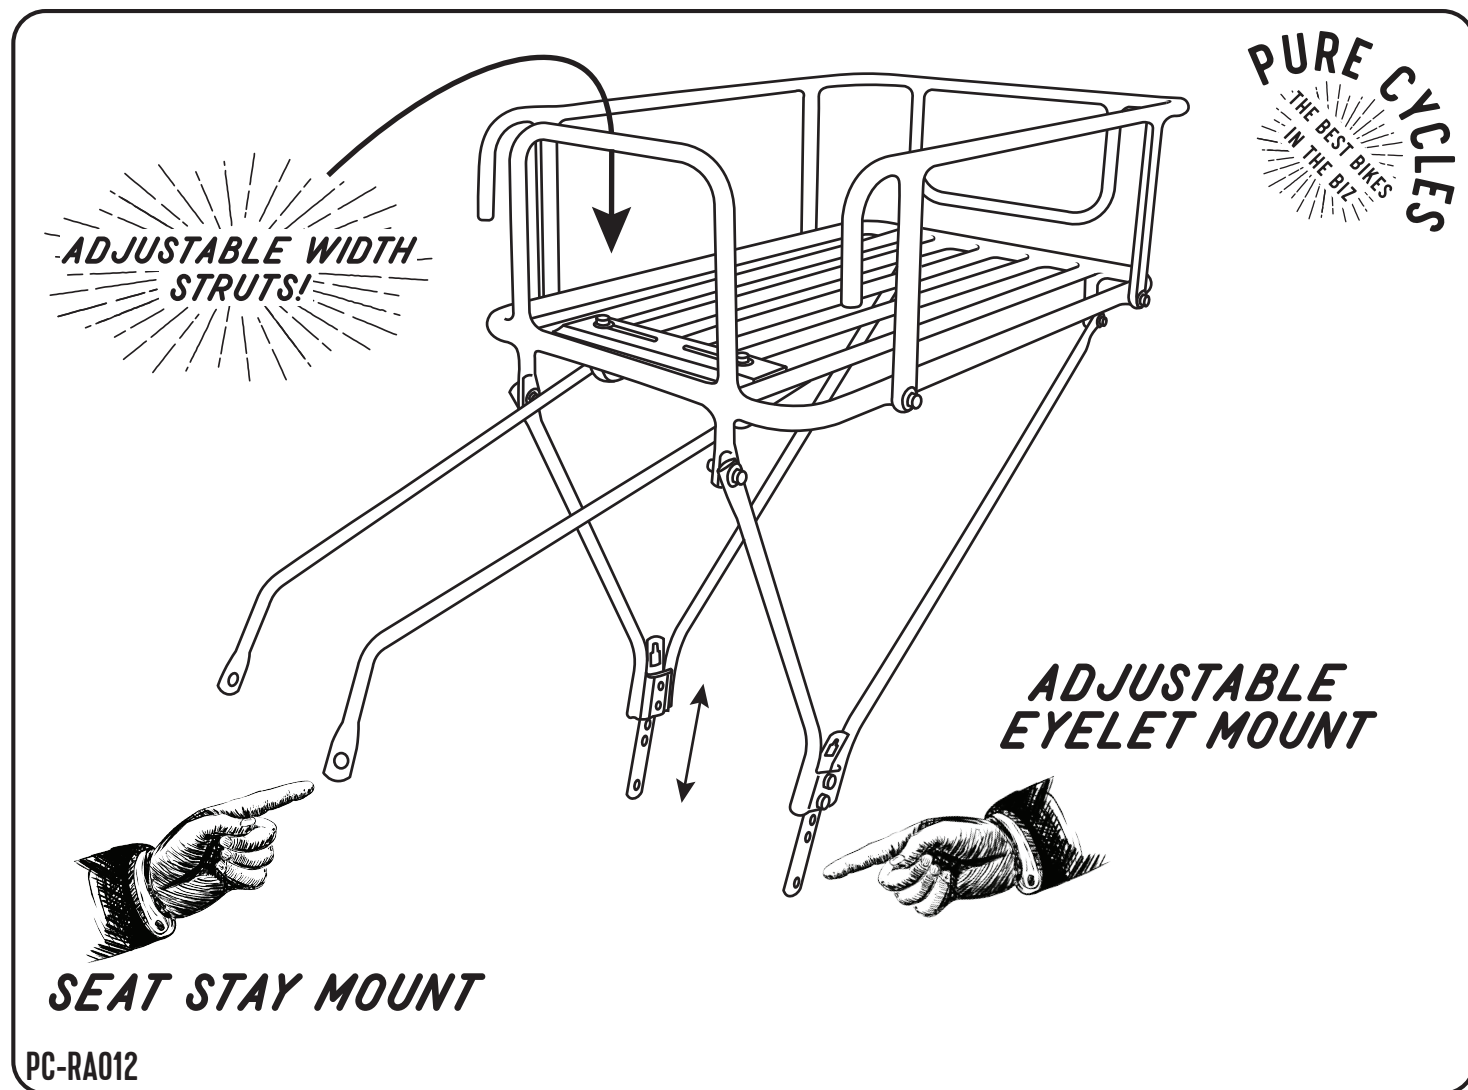

PURE CYCLES
THE BEST BIKES
IN THE BIZ

**ADJUSTABLE WIDTH
STRUTS!**

**ADJUSTABLE
EYELET MOUNT**

SEAT STAY MOUNT

PC-RA012

INSTRUCTIONS

BEGIN BY LOOSENING THE SEAT STAY STRUTS SO THAT THEY MOVE FREELY.

PLACE THE RACK OVER THE REAR TIRE AND CHECK FOR CLEARANCE ISSUES.
THEN ATTACH EYELET MOUNTS TO THE EYELETS NEAR THE AXLE WITH
INCLUDED HARDWARE.

DEPENDING ON FRAME/TIRE SIZE, THE RACK HEIGHT CAN BE ADJUSTED BY
LOOSENING THE TWO BOLTS IN THE EYELET MOUNT AND MOVING THE MOUNT UP OR DOWN.

ATTACH SEAT STAY STRUTS TO SEAT STAY MOUNTS ON FRAME AND ADJUST SO THAT THE RACK IS EVEN
WITH THE GROUND THEN TIGHTEN WHERE THE STRUTS ATTACH TO THE RACK.

TIGHTEN/DOUBLE CHECK ALL BOLTS ARE FULLY TIGHTENED BEFORE USE AND PERIODICALLY AFTER INSTALLATION

